SLLS081B – JANUARY 1971 – REVISED MAY 1995

- **Meets or Exceeds the Requirement of ANSI EIA/TIA-232-E and ITU Recommendation V.28**
- **Withstands Sustained Output Short Circuit to Any Low-Impedance Voltage Between –25 V and 25 V**
- **2-μs Maximum Transition Time Through the 3-V to –3-V Transition Region Under Full 2500-pF Load**
- **Inputs Compatible With Most TTL Families**
- **Common Strobe Input**
- **Inverting Output**
- **Slew Rate Can Be Controlled With an External Capacitor at the Output**
- **Standard Supply Voltages . . . ±12 V**

D OR P PACKAGE
(TOP VIEW)



description

The SN75150 is a monolithic dual line driver designed to satisfy the requirements of the standard interface between data terminal equipment and data-communication equipment as defined by ANSI EIA/TIA-232-E. A rate of 20 000 bits per second can be transmitted with a full 2500-pF load. Other applications are in data-transmission systems using relatively short single lines, in level translators, and for driving MOS devices. The logic input is compatible with most TTL families. Operation is from 12-V and –12-V power supplies.

The SN75150 is characterized for operation from 0°C to 70°C.

logic symbol†

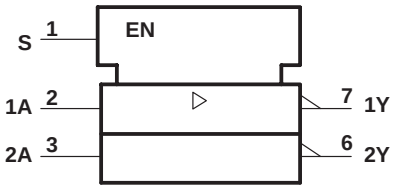

† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

logic diagram (positive logic)

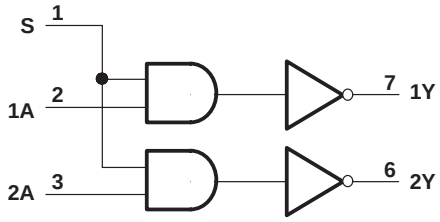

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 1995, Texas Instruments Incorporated

schematic (each line driver)

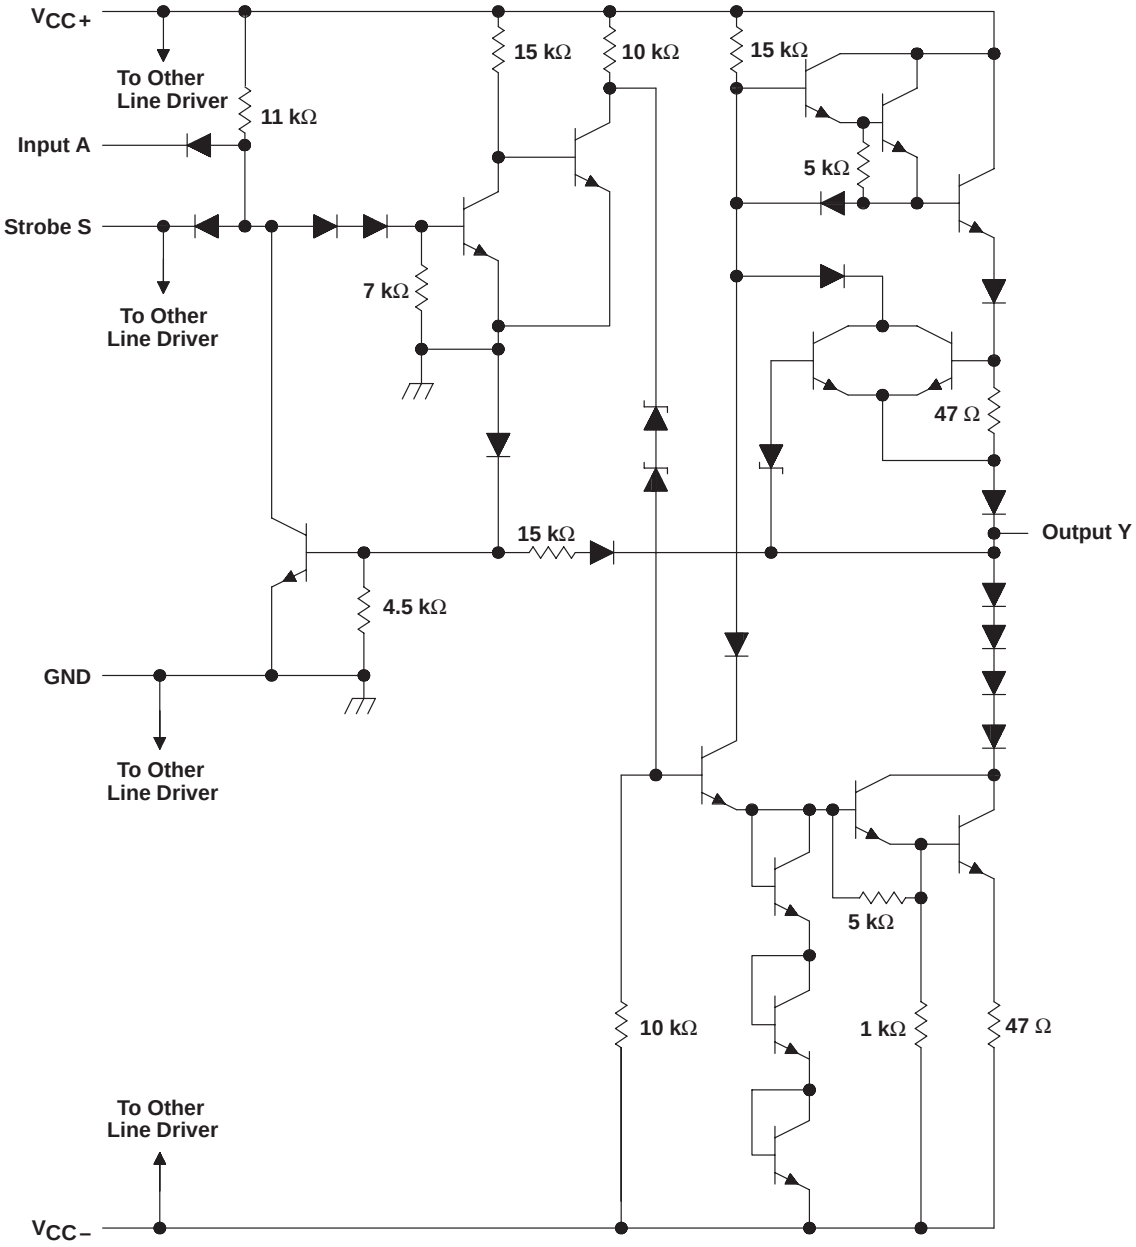

Resistor values shown are nominal.

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage, V_{CC+} (see Note 1) . . . . . 15 V
Supply voltage, V_{CC-} . . . . . –15 V
Input voltage, V_I . . . . . 15 V
Applied output voltage . . . . . ±25 V
Continuous total power dissipation . . . . . See Dissipation Rating Table
Operating free-air temperature range, T_A . . . . . 0°C to 70°C
Storage temperature range, T_{stg} . . . . . –65°C to 150°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds . . . . . 260°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: Voltage values are with respect to network ground terminal.

DISSIPATION RATING TABLE

PACKAGE	$T_A \le 25°C$ POWER RATING	DERATING FACTOR ABOVE $T_A = 25°C$	$T_A = 70°C$ POWER RATING
D	725 mW	5.8 mW/°C	464 mW
P	1000 mW	8.0 mW/°C	640 mW

recommended operating conditions

	MIN	NOM	MAX	UNIT
Supply voltage, V_{CC+}	10.8	12	13.2	V
Supply voltage, V_{CC-}	–10.8	–12	–13.2	V
High-level input voltage, V_{IH}	2		5.5	V
Low-level input voltage, V_{IL}	0		0.8	V
Driver output voltage, V_O			±15	V
Operating free-air temperature, T_A	0		70	°C

electrical characteristics over recommended operating free-air temperature range, $V_{CC\pm}$ = ±13.2 V (unless otherwise noted)

PARAMETER			TEST CONDITIONS		MIN	TYP†	MAX	UNIT
V_{OH}	High-level output voltage		V_{CC+} = 10.8 V, V_{IL} = 0.8 V,	V_{CC-} = –10.8 V, R_L = 3 kΩ to 7 kΩ	5	8		V
V_{OL}	Low-level output voltage (see Note 2)		V_{CC+} = 10.8 V, V_{IH} = 2 V,	V_{CC-} = –10.8 V, R_L = 3 kΩ to 7 kΩ		–8	–5	V
I_{IH}	High-level input current	Data input	V_I = 2.4 V			1	10	μA
		Strobe input				2	20	
I_{IL}	Low-level input current	Data input	V_I = 0.4 V			–1	–1.6	mA
		Strobe input				–2	–3.2	
I_{OS}	Short-circuit output current‡		V_O = 25 V			2	8	mA
			V_O = –25 V			–3	–8	
			V_O = 0,	V_I = 3 V	10	15	30	
			V_O = 0,	V_I = 0	–10	–15	–30	
I_{CCH+}	Supply current from V_{CC+}, high-level output		V_I = 0, T_A = 25°C	R_L = 3 kΩ,		10	22	mA
I_{CCH-}	Supply current from V_{CC-}, high-level output					–1	–10	
I_{CCL+}	Supply current from V_{CC+}, low-level output		V_I = 3 V, T_A = 25°C	R_L = 3 kΩ,		8	17	mA
I_{CCL-}	Supply current from V_{CC-}, low-level output					–9	–20	

† All typical values are at V_{CC+} = 12 V, V_{CC-} = –12 V, T_A = 25°C.
‡ Not more than one output should be shorted at a time.
NOTE 2: The algebraic convention, in which the less positive (more negative) limit is designated as minimum, is used in this data sheet for logic levels only, e.g., when –5 V is the maximum, the typical value is a more negative voltage.

switching characteristics, V_{CC+} = 12 V, V_{CC-} = –12 V, T_A = 25°C (see Figure 1)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
t_{TLH}	Transition time, low-to-high-level output	C_L = 2500 pF,	R_L = 3 kΩ to 7 kΩ	0.2	1.4	2	μs
t_{THL}	Transition time, high-to-low-level output			0.2	1.5	2	μs
t_{TLH}	Transition time, low-to-high-level output	C_L = 15 pF,	R_L = 7 kΩ		40		ns
t_{THL}	Transition time, high-to-low-level output				20		ns
t_{PLH}	Propagation delay time, low-to-high-level output	C_L = 15 pF,	R_L = 7 kΩ		60		ns
t_{PHL}	Propagation delay time, high-to-low-level output				45		ns

PARAMETER MEASUREMENT INFORMATION

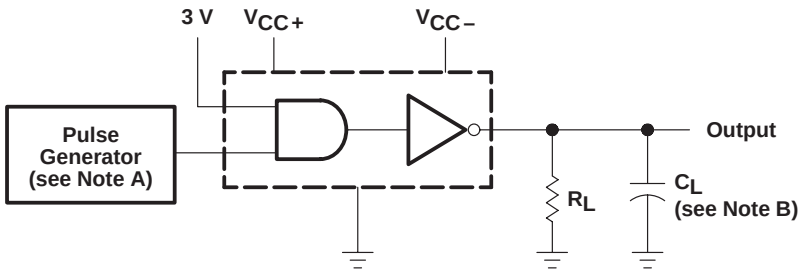

TEST CIRCUIT

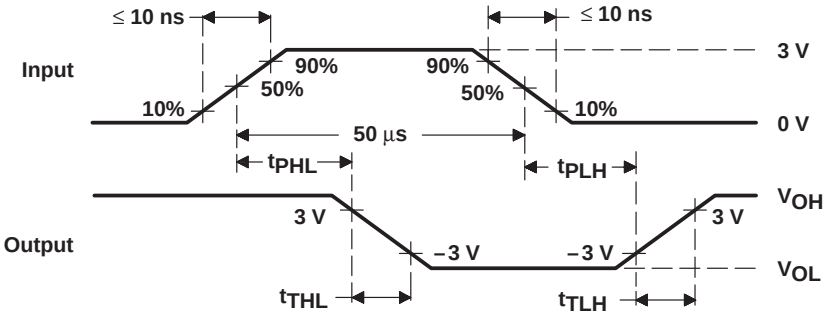

NOTES: A. The pulse generator has the following characteristics: duty cycle ≤ 50%, $Z_O \approx 50\ \Omega$.
B. C_L includes probe and jig capacitance.

Figure 1. Test Circuit and Voltage Waveforms

TYPICAL CHARACTERISTICS

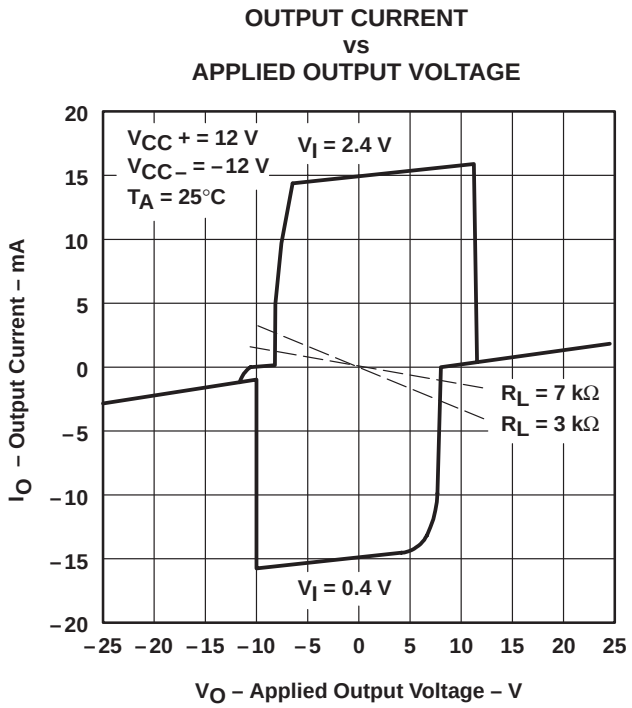

Figure 2

APPLICATION INFORMATION

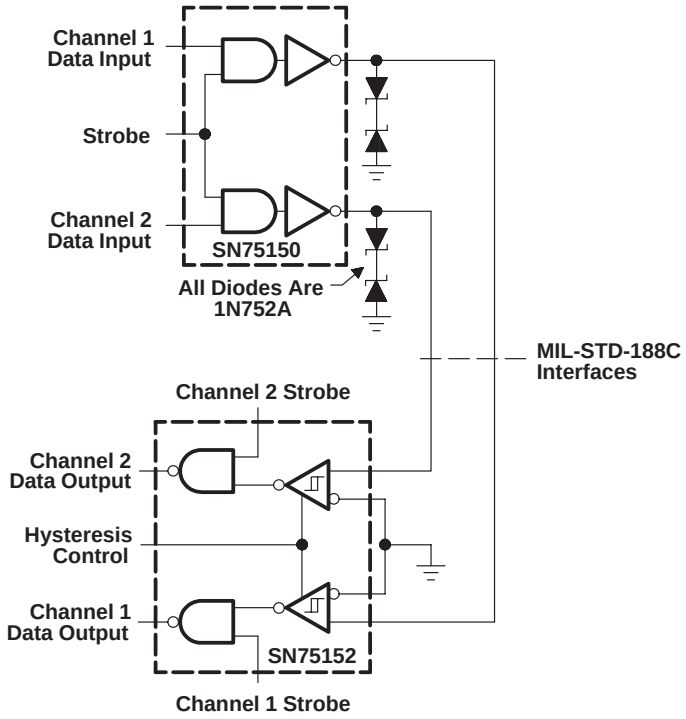

Figure 3. Dual-Channel Single-Ended Interface Circuit Meeting MIL-STD-188C, Paragraph 7.2.

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.

Copyright © 1998, Texas Instruments Incorporated